

Emission Test Certificate

Thursday, 17th November 2016

Supplier: Matilda Veneer Pty Ltd (18-22 Activity Crescent, Molendinar, QLD, 4214)

Sample Description: Hoop Pine Plywood 30mm


Date Tested: November 2016 (Tested by FORAY Laboratories – NATA Accreditation 1231)

Test Method: AS/NZS 2098.11:2005 “Methods of test for veneer and plywood - Determination of formaldehyde emissions for plywood”

Emission Data:

Green Building Council of Australia Green Star Office Design & As Built v3	Hoop Pine Plywood 30mm
Formaldehyde emission limit for Super E0: <0.3 mg/L	Formaldehyde emission rate: 0.04mg/L*
Formaldehyde Emission Class (as per Table IEQ-14.1): Super E0	

**The above results may considered representative of the equivalent and lesser weighted product specifications that are made from the same raw materials and these include Hoop Pine Plywood in the thickness ranges of: 1.5mm, 4.0mm; 6.5mm; 9.5mm; 12.5mm; 16mm; 18.5mm, and 25mm as advised by Matilda Veneer.*

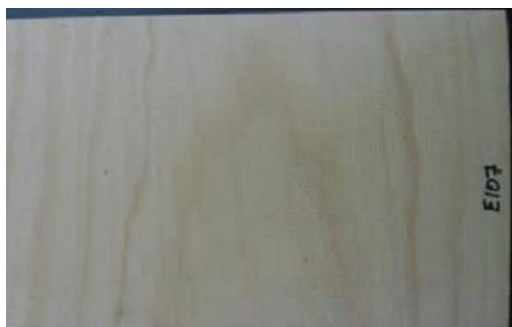


Dr. Vyt Garnys
PhD, BSc(Hons) AIMM, ARACI, ISIAQ
ACA, AIRAH, FMA
Managing Director and Principal Consultant



Nick Joy
BSc(Hons)
Consultant



Tuan Duong
B Eng. (Chem.)
Consultant

CV161101b